

Braums ITS Field Cabinet

Braums Pty Ltd FC1000 Its Field Cabinet is TfNSW approved to TSI-SP-012 Roadside Equipment Housings under ITS-AN000076.




Mechanical Features:


- Manufactured from 2mm Aluminium Grade 5052 H32
- AS2700 T33 Smoke Blue Anti-Graffiti coating
- IP45 rated to AS60529-2004 by VIPAC
- AS/NZS 3000 suitability no. CS11044N
- TfNSW VC002-83 Standard footing
- TfNSW VM005-1 Door locks
- TfNSW VM625-27 Lifting Bracket
- 23RU 19-inch rack
- Sloped roof for water run-off
- Rack mounted cable clamps
- Rack mounted switch board

Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
1390	800	420	56

Electrical Features:

1. Fault Current Limiter – 32A Fuse
2. Main Switch – 32A 10kA
3. SPD – 32A 10kA
4. Surge Diverter
5. AUX – 10A 10kA
6. Lighting – 4A 10kA
7. Lighting – 12V 10W
8. RCD GPO's
9. EMI Mains Filter

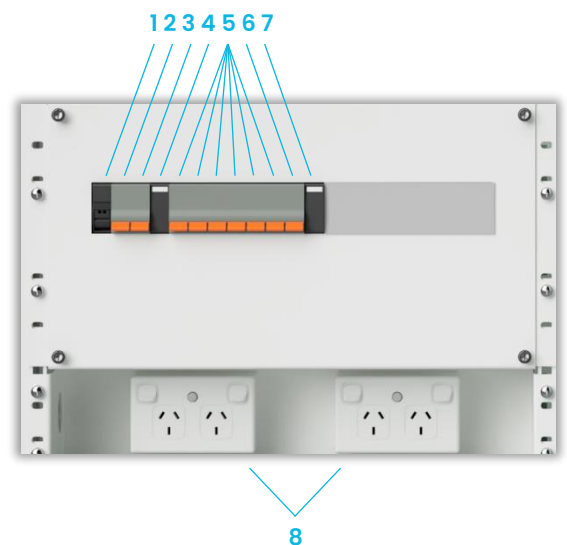

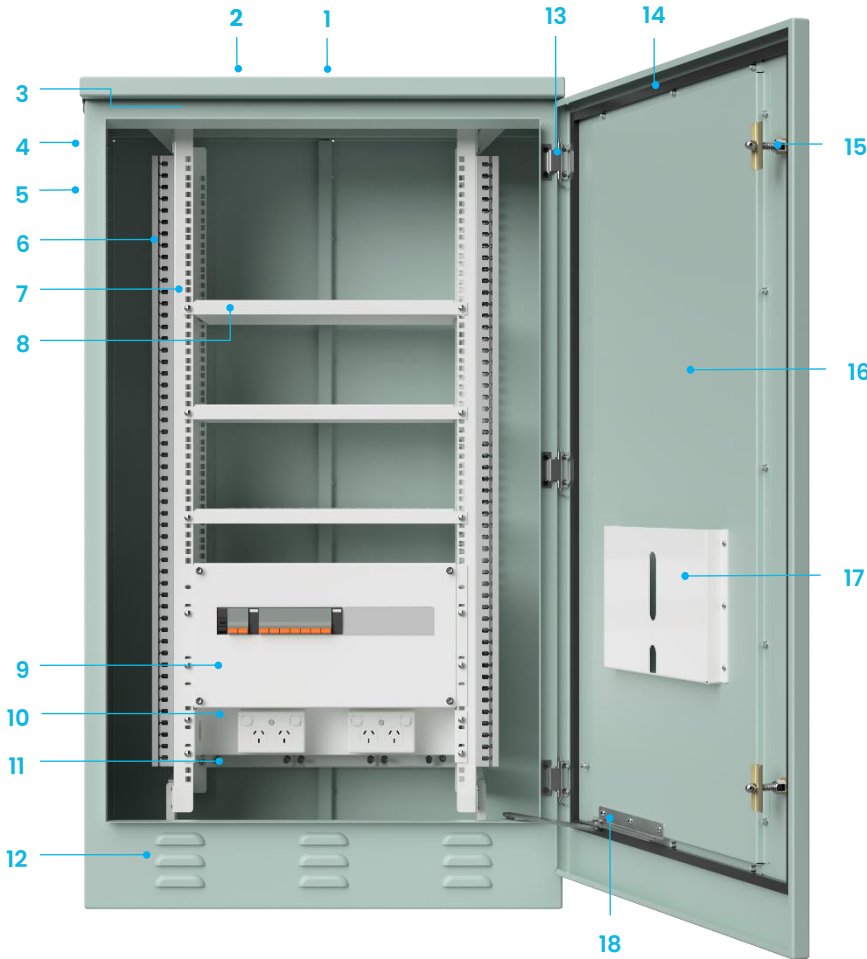

Specifications:

1. Weatherproof IP45 Cabinet
2. Removable roof for top hat
3. Cabinet lighting
4. Lifting bracket
5. Nameplate
6. Cable Tray
7. 19" 23RU rails
8. 19" Rack mounted shelving
9. 19" Rack mounted load centre
10. 19" Rack mounted RCD GPO's
11. 19" Rack mounted Cable Clamps
12. Ventilation
13. Stainless steel hinges
14. EPDM foam gasket
15. TfNSW locks
16. Door Stiffener
17. Document pocket
18. Stainless Steel door retainer

Cabinet Footing

